



K-TIGER Panel Van
popular for delivery and business use due to its secure cargo area.



K-TIGER panel van

BASIC SPECIFICATION		EXC	EXM	EXG
Seat		2 - 3 seats	2 - 3 seats	2 - 3 seats
A/C System		12,000 Kcal powerful air conditioner		
Gross Vehicle Weight (GVM)(kg)		4,400	5,000	5,000
Height	Low - Deck (A/C)	2,360(2,530)		
	High - Deck (A/C)	2,620(2,800)		
Wheel Base (mm)		3,665	4,325	
TREAD (Single)	Front	1,700	-	
	Rear	1,720	-	
TREAD (Double)	Front	1,689		
	Rear	1,525		
Overhang (mm)	Front	1,025	1,012	
	Rear	1,228	1,590	2,140
Min. Turning Diameter (m)		13.5	16	
BASIC & SUSPENSION SYSTEM				
Body Structure		LHD / RHD		
Front Suspension type		Spring independent suspension		
Rear Suspension type		LEAF SPRING (2/3 pcs)	LEAF SPRING (2/3 pcs)	
Rear Axle Load Capacity (KG)	Single tyre	2,500	-	
	Double tyre	3,500		
Tyre	Single tyre	215/75R16, 225/75R16		-
	Double tyre	195/75R16, 205/75R16		
Engine		Diesel		



Exterior Panel Van

Front Side View



Back Side View



Front View




Interior Panel Van




Adjustable Shelving and Racks



Sliding Door

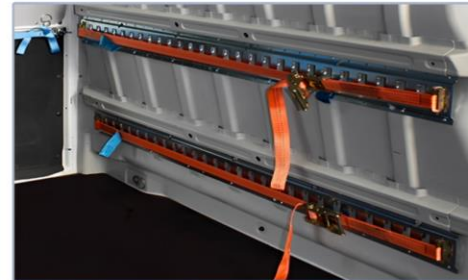


Securing Strap

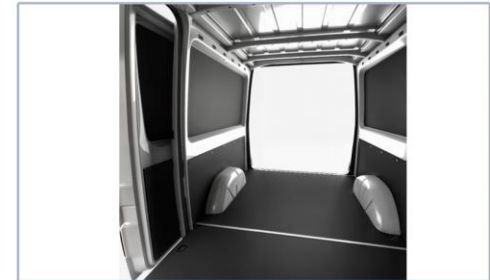


Inside



Partitions

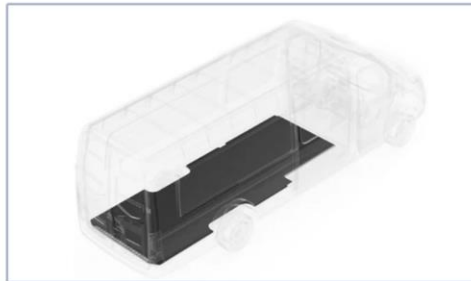

Flooring

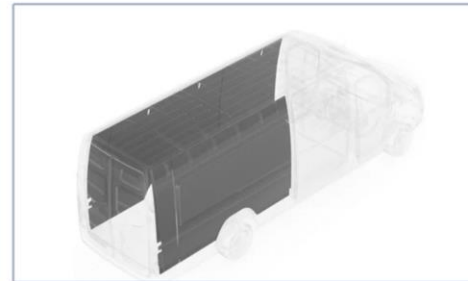

Liners



Shelving



Full-width bulkhead. The bulkhead protects the driver and co-driver from shifting loads. Bulkhead with fixed or sliding window. Optionally, the bulkhead can be fitted with a fixed or sliding window, allowing the driver to keep an eye on the load compartment.



Reversing camera. When reverse gear is engaged, the reversing camera sends images of the area behind the vehicle to a 17.8-cm monitor. In this way, the system makes parking and manoeuvring easier and safer (display also possible via COMAND APS).



Super-single tyres. Vehicles with a perm. GVW of 4.6 t are optionally available with super-single tyres in place of the twin tyres. In the case of the panel van, these tyres give a through-loading width of approx. 1.22 m between the wheel arches, making it possible to load Europallets cross-wise.



Chrome-trimmed radiator grille. An attractive chrome trim lends the radiator grille a distinctive look and further enhances the appearance of the vehicle.



Trailer coupling (ball-type head). Both rigid and detachable ball-head trailer couplings are available, with 13-pin trailer socket. Maximum permissible drawbar load is 100 kg, with a maximum permissible towing capacity of 2 t (optionally higher).



Side rub strips. Wide plastic strips protect the bodywork from minor damage.



Full wheel covers. As well as looking good, the full wheel covers made from resistant plastic also protect the valves.



Bi-xenon headlamps with Add-Light system and cornering light function. Better illumination of the area directly to the side of the vehicle enhances safety, especially on tight bends, at junctions and when manoeuvring.



Arctic white



Calcite yellow



Hibiscus red



Velvet red



Aqua green



Steel blue



Vanda blue



Brilliant silver metallic



Graphite grey metallic



Amber red metallic



Jasper blue metallic



Carbon black metallic



Khmobility Inc.



+82 10 896 000 01, +82 70 5033 9691



Fax : +82 2 2139 1114



leekyo7915@daum.net



www.kh-mobility.com www.khkmarket.com



KOREA HQ: #3-304 Munyeong Queens Park, 212 Gonghang-daero, Gangseo-gu, Seoul KOREA



Line



Whatsup



Wechat



Telegram



Kakao



Facebook